

---

# Three Phase Inverters for Residential Installations for Australia

SE5K-AU / SE7K-AU / SE8K-AU

INVERTERS



## Specifically designed to work with power optimisers

- // Noise level suitable for residential environment – No external fan
- // Quick and easy inverter commissioning directly from a smartphone using the SolarEdge SetApp
- // Superior efficiency (98%)
- // Small, lightest in its class, and easy to install
- // Built-in module-level monitoring
- // Internet connection through Ethernet or Wireless (via Wi-Fi or Cellular plug-ins)
- // Integrated DC Safety Unit - Eliminates the need for external DC isolators
- // IP65 – Outdoor and indoor installation
- // Fixed voltage inverter for longer strings

# / Three Phase Inverters for Residential Installations for Australia

SE5K-AU / SE7K-AU / SE8K-AU

	SE5K-AU	SE7K-AU	SE8K-AU	
<b>APPLICABLE TO INVERTERS WITH PART NUMBER</b>				
<b>SEXK- AUXTXBNU4</b>				
<b>OUTPUT</b>				
Rated AC Power Output	4985	7000	8000	W
Maximum AC Power Output	4985	7000	8000	VA
AC Output Voltage - Line to Line / Line to Neutral (Nominal)	400 / 230			Vac
AC Output Voltage - Line to Neutral Range	184 - 264.5			Vac
AC Frequency	50/60 ± 5%			Hz
Maximum Continuous Output Current (per Phase)	8	11.5	13	A
Grids Supported - Three Phase	3 / N / PE (WYE with Neutral)			
Utility Monitoring, Islanding Protection, Configurable Power Factor, Country Configurable Thresholds	Yes			
<b>INPUT</b>				
Maximum DC Power (Module STC)	6750	9450	10800	W
Transformer-less, Ungrounded	Yes			
Maximum Array Input Voltage	600			Vdc
Maximum Voltage to Earth (DC to GND)	415			Vdc
Maximum Input Current	8.5	12	13.5	Adc
Reverse-Polarity Protection	Yes			
Ground-Fault Isolation Detection	700kΩ Sensitivity			
Maximum Inverter Efficiency	98			%
European Weighted Efficiency	97.3	97.4	97.6	%
Nighttime Power Consumption	< 2.5			W
<b>ADDITIONAL FEATURES</b>				
Supported Communication Interfaces <sup>(1)</sup>	RS485, Ethernet, Wi-Fi <sup>(2)</sup> , ZigBee for Smart Energy (optional) <sup>(3)</sup> , Cellular (optional)			
Inverter Commissioning	With the SetApp mobile application using built-in Wi-Fi access point for local connection			
Smart Energy Management <sup>(4)</sup>	Export Limitation, Home Energy Management (Device Control)			
<b>STANDARD COMPLIANCE</b>				
Safety	IEC62109, AS/NZS3100			
Grid Connection Standards	AS/NZS4777:2015			
Emissions	IEC61000-6-2, IEC61000-6-3, IEC61000-3-11, IEC61000-3-12, FCC part15 class B			
RoHS	Yes			
<b>INSTALLATION SPECIFICATIONS</b>				
AC output conduit size / Wire cross section	20mm minimum / 3-13mm <sup>2</sup>			
DC input conduit size / Wire cross section	20mm minimum / 3-13mm <sup>2</sup>			
DC Input	Terminal blocks for 2 arrays enclosed through 2 separate conduits <sup>(5)</sup>			
Dimensions with Safety Switch (H x W x D)	775 x 315 x 191			mm
Weight	22.2			kg
Operating Temperature Range	-40 - +60 <sup>(6)</sup>			°C
Cooling	Internal fan			
Noise	< 40			dBA
Protection Rating	IP65 - Outdoor and Indoor			
Mounting	Bracket Provided			

(1) Refer to Datasheets -> Communications category in Downloads page for specifications of optional communication options: <http://www.solaredge.com/groups/support/downloads>

(2) Wi-Fi connectivity requires an external antenna. For more information refer to: <http://www.solaredge.com/sites/default/files/se-wifi-zigbee-antenna-datasheet.pdf>

(3) For more information refer to: <https://www.solaredge.com/sites/default/files/se-zigbee-plug-in-wireless-communication-for-setapp-datasheet-au.pdf>

(4) An export meter is required for export limitation and most of home energy management functions


(5) Two arrays must be connected to the inverter; refer to image below. For complete design guidelines refer to:

[https://www.solaredge.com/sites/default/files/three\\_phase\\_inverter\\_residential\\_design\\_installation\\_addendum\\_au.pdf](https://www.solaredge.com/sites/default/files/three_phase_inverter_residential_design_installation_addendum_au.pdf)

(6) For power de-rating information refer to: <https://www.solaredge.com/sites/default/files/se-temperature-derating-note.pdf>

# / Three Phase Inverters for Residential Installations for Australia

SE5K-AU / SE7K-AU / SE8K-AU

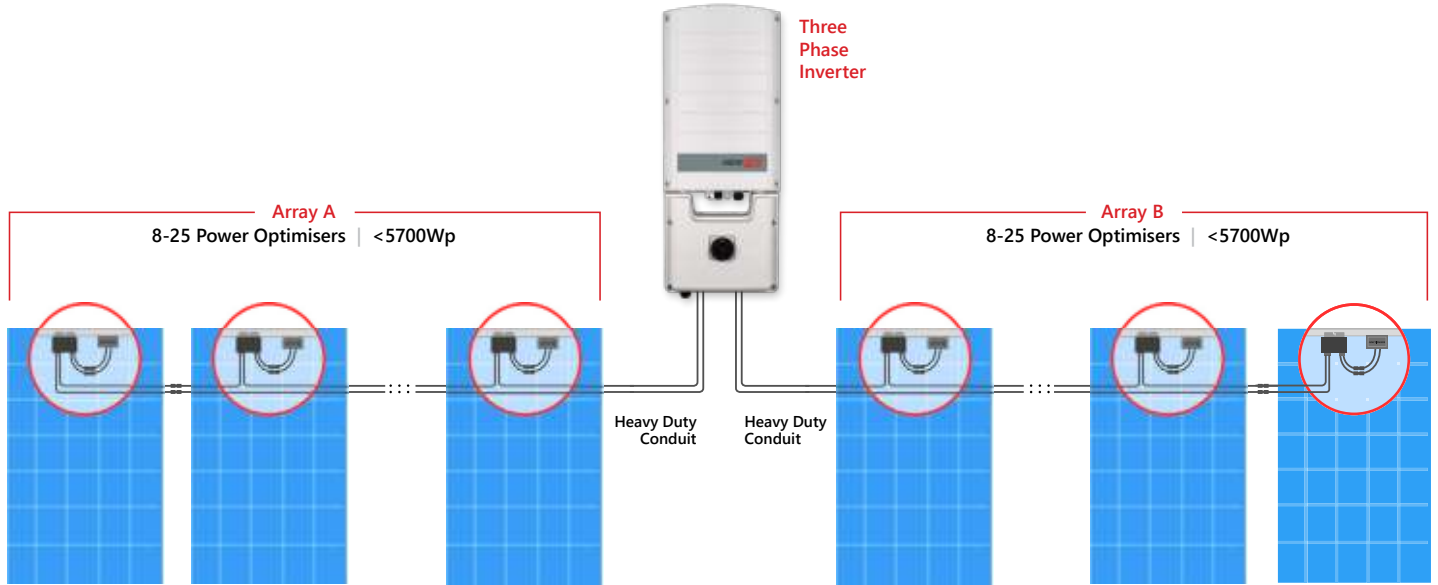

CE